
DRG.NO A2 400206-00885A


SURFACE FINISH


NO	REF. NO	DESCRIPTION	SPEC'	Q'TY	REMARKS
1	–	OIL PUMP	3P700-320EVB	1	NOP
2	–	COMPRESSOR	ZR36K3E-TF5	1	Copeland
3	–	TEMP' SENSOR	6M	1	KWANG RIM
⚠1 4	–	Pressure Gauge	0.1Mpa	1	DAHO


Cooler Specification


MODEL	CIL2201A-C
Cooling Capacity (50/60Hz)	8,820 / 10,500W Test Oil ISO VG2
Power Source	AC 220V 50/60Hz
Compressor	2,800W
Oil Pump (50/60Hz)	700W (36/46L/min)
Fan Motor	200W X 2EA
Refrigerant	R407C
Acceptable Temp.	5~45°C (Oil & Room Temp')
Usable Oil	Lubricant. Working Oil (VG2 ~ VG10)







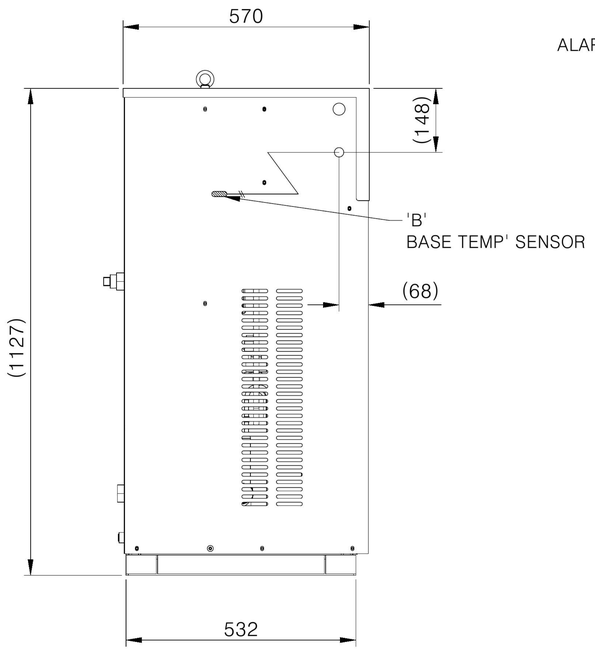


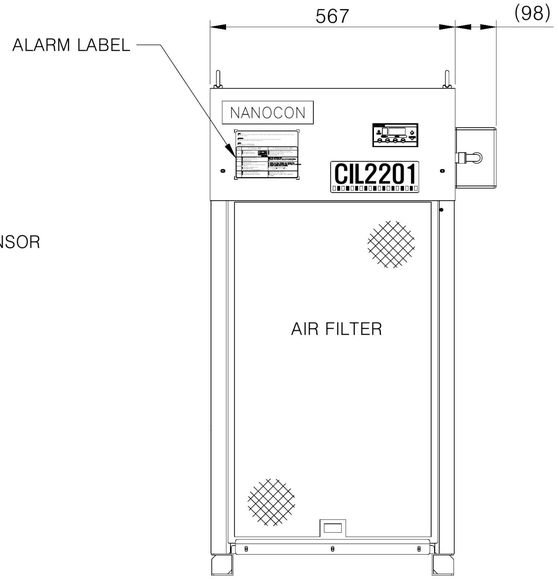


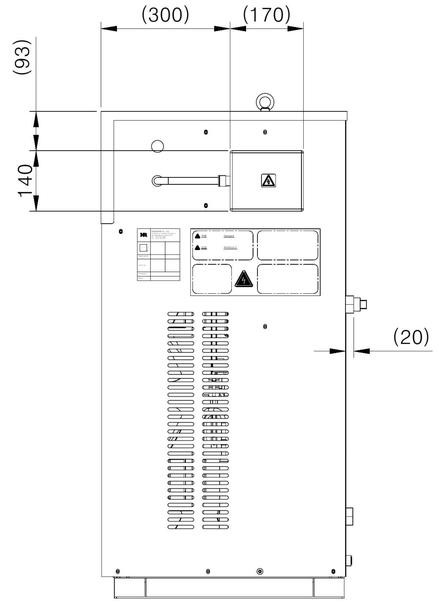

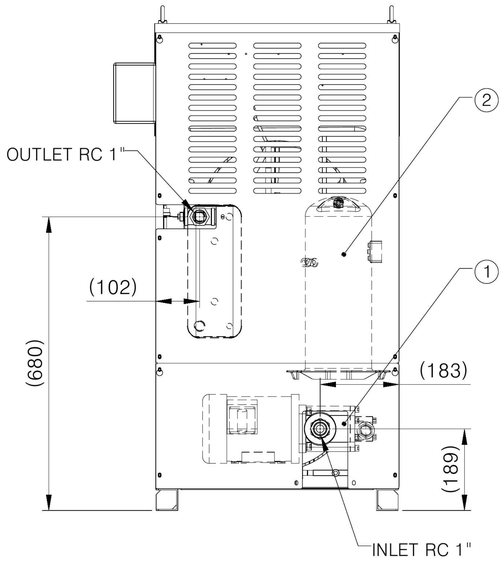

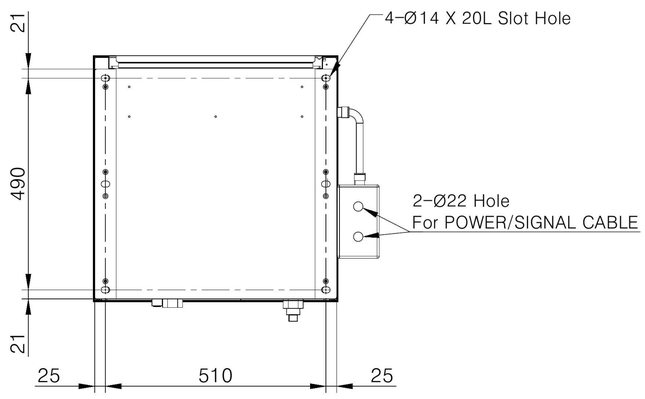

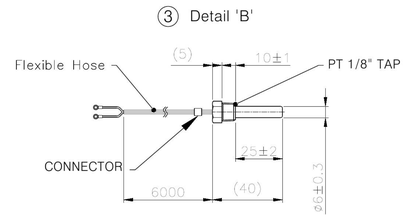



주 서

1. Pressure Gauge는 단품 납품
2. 기체 동조 추종식.
3. Return Oil Temp' 제어 방식

SUFFIX	MARK	SUBJECT	ENC NO.	DATE	DRAWN	CHECKED
	⚠3 X					
	⚠2 X					
A	⚠1 X 2	압력 게이지 사양 변경		21.06.19	S.H.KIM	K.J.APRK

GENERAL TOLERANCE (MACHINING)			UNSPECIFIED CHAMFERS	C1	APPROVE TSUNODA
LIMITS OVER ~ TO	MINUTENESS NOR	MAL	UNSPECIFIED RADII	R3	CHECKED ISHIDA
0.5 ~ 6	± 0.05	± 0.1	HEAT TREATMENT HARDNESS		CHECKED S.H.HA
6 ~ 30	± 0.1	± 0.2			
30 ~ 120	± 0.15	± 0.3	HEAT TREATMENT METHOD		DESIGNED S.H.HA
120 ~ 315	± 0.2	± 0.5			
315 ~ 1000	± 0.3	± 0.8	SURFACE TREATMENT	PAINT	DATE 2017.09.11
1000 ~ 2000	± 0.5	± 1.2			
2000 ~ 4000	±0.8	±2.0			

TITLE	OIL COOLER		Q'TY	1ST	
ASS'Y	CIL2201A-C		SCALE	N/S	
MODEL	CIL-2201	MAT.	COOLING UNIT	W,T	120KG
DRG.NO A2	400206-00885A				
PROJECT NAME	NANOCON	KWANG RIM KWANG RIM CORPORATION			

A2 (420 X 594)

THIS DRAWING IS PROPRIETARY TO KWANG RIM.
NO PART OF THIS DRAWING MAY BE REPRODUCED
WITHOUT THE PERMISSION OF KWANG RIM
허가없이 복사할 수 없음