
DWG.NO R90695C

관리번호	MARK	DATE	DETAIL OF REVISION	CHECKED	APPROVED
	△				
	△				

POWER SOURCE 200V 50/60Hz 3Ph
220V 60Hz

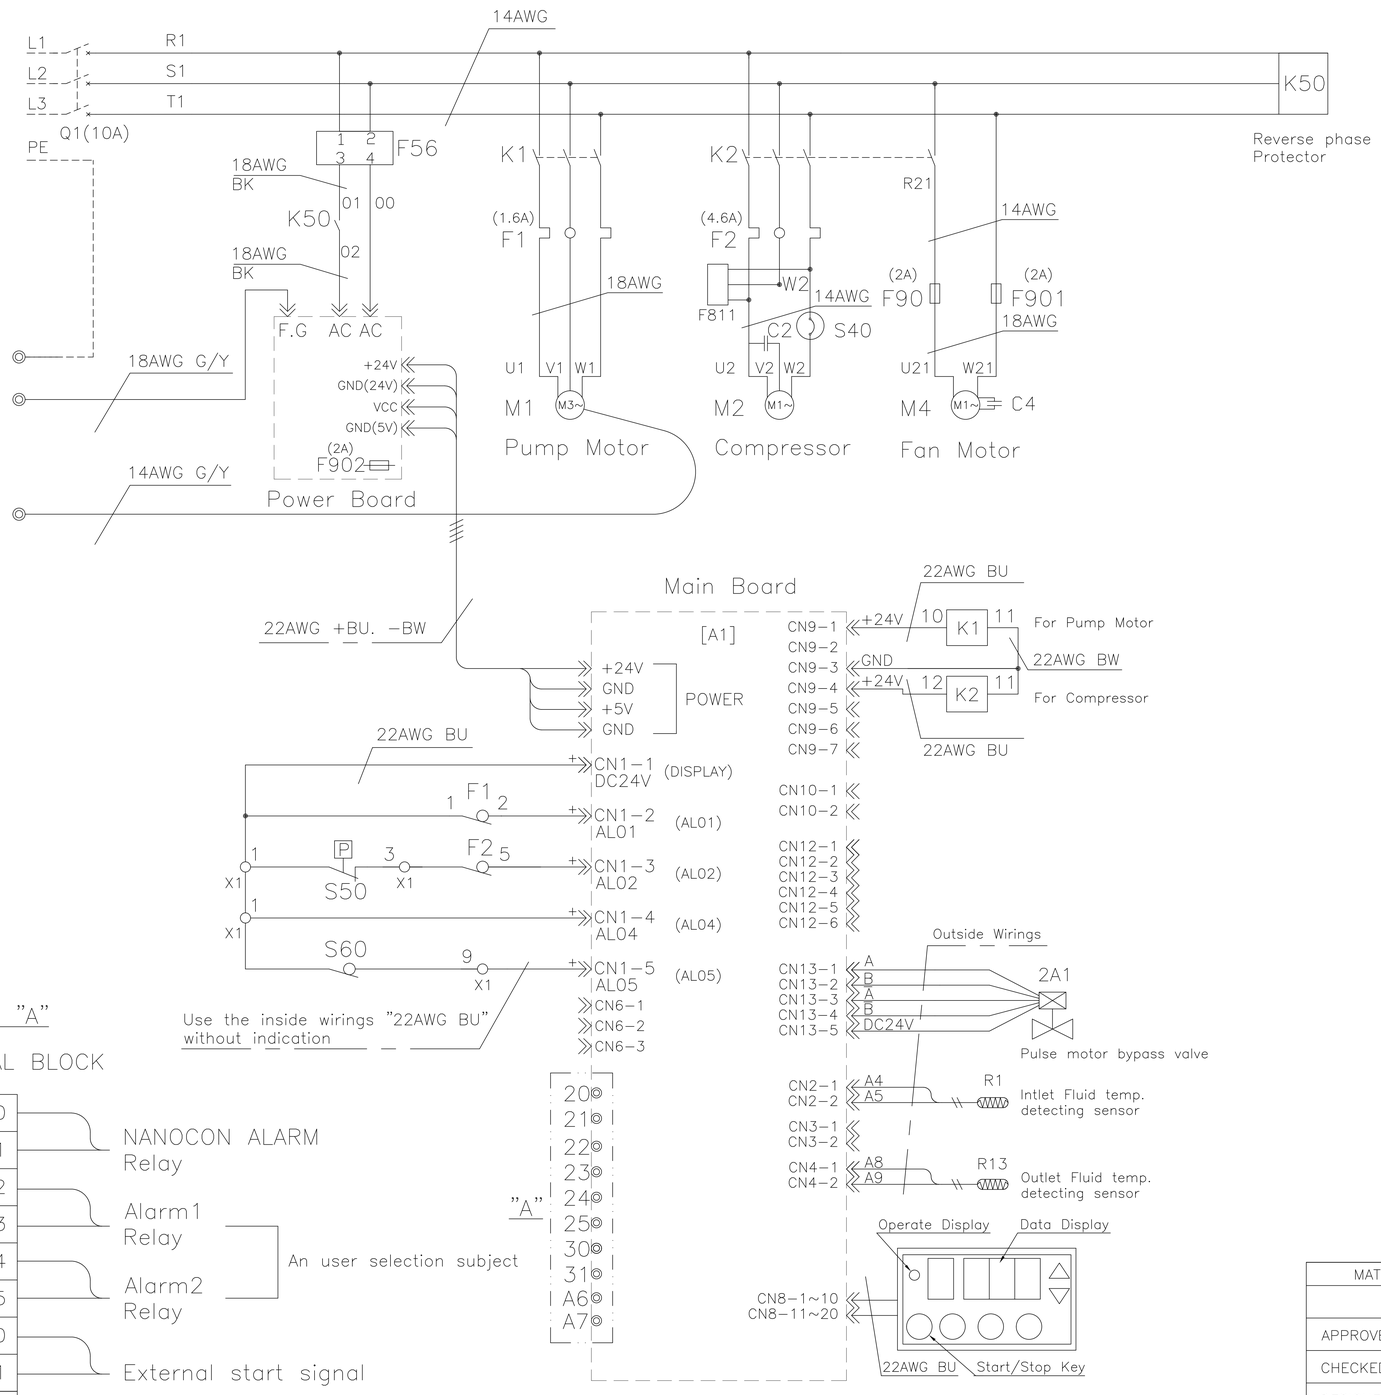

Classification	In power supply OFF	Point of contact output classification	Rating load	Smallest point of contact voltage/electric current
NANOCON Alarm	OFF	Parameter setting Initial value – Normally "Close"	AC250V/3A DC30V/3A	DC5V/10mA
Alarm1	OFF	Parameter setting Initial value temperature warnning in a range – Normally "Close"	AC250V/3A DC30V/3A	DC5V/10mA
Alarm2	OFF	Parameter setting Initial value – FIL cleaning signature	AC250V/3A DC30V/3A	DC5V/10mA

Remote signal	OFF	ON	The part which is used for External start signal
Contact	Opening	Short or contact "Close"	Single pole and single action switch or make contact of start signal (Min. contact voltage/current satisfies more than 24V/20mA)

Detail "A"

TERMINAL BLOCK

MAT'L	HEAT TREATMENT	SURF.TREATMENT		
			TITLE	ELECTRIC DIAGRAM
APPROVED				CIL301A-C
CHECKED			PJT NAME	OIL COOLER
DESIGNED	S.H.HA	2012.01.03		NANOCON
DRAWN	S.H.HA	2012.01.03	DRG NO.	R90695C
SCALE N/S	W.T	Q'TY	KWANG RIM	
	MODEL CIL301A-C		KWANG RIM CORPORATION	

THIS DRAWING IS PROPRIETARY TO SPHC.
NO PART OF THIS DRAWING MAY BE REPRODUCED
WITHOUT THE PERMISSION OF SPHC.
이 도면의 저작권은 성화에 있으며 무단 복사를 금합니다.