

–	–	DRG.NO A2
SURFACE FINISH		


Specipication

MODEL	CIL501A-C
Capacity(50/60Hz)	1600/1900W
Power sourse	AC 220/220V, 50/60Hz
Compressor	670W
Trochoid Pump	200W(12/14.4 L/min)
Fan Motor	100W
Refrigerant	R-410A
Acceptable temp. range	5~45°C(Room, Oil)
Usable Oil	Lubricant, Working oil (VG2~10)
Oil Piping(Inlet/Oulet)	PT1/2" / PT1/2"
Dimension(W*H*D)	415*450*675
Control Type	Hot Gas Bypass
Control Range	±0.1°C

Detail of Area 'A'



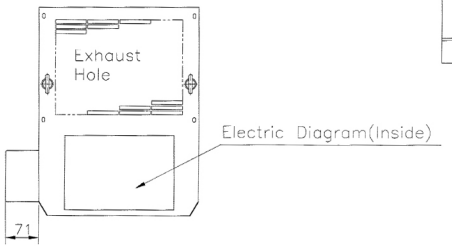

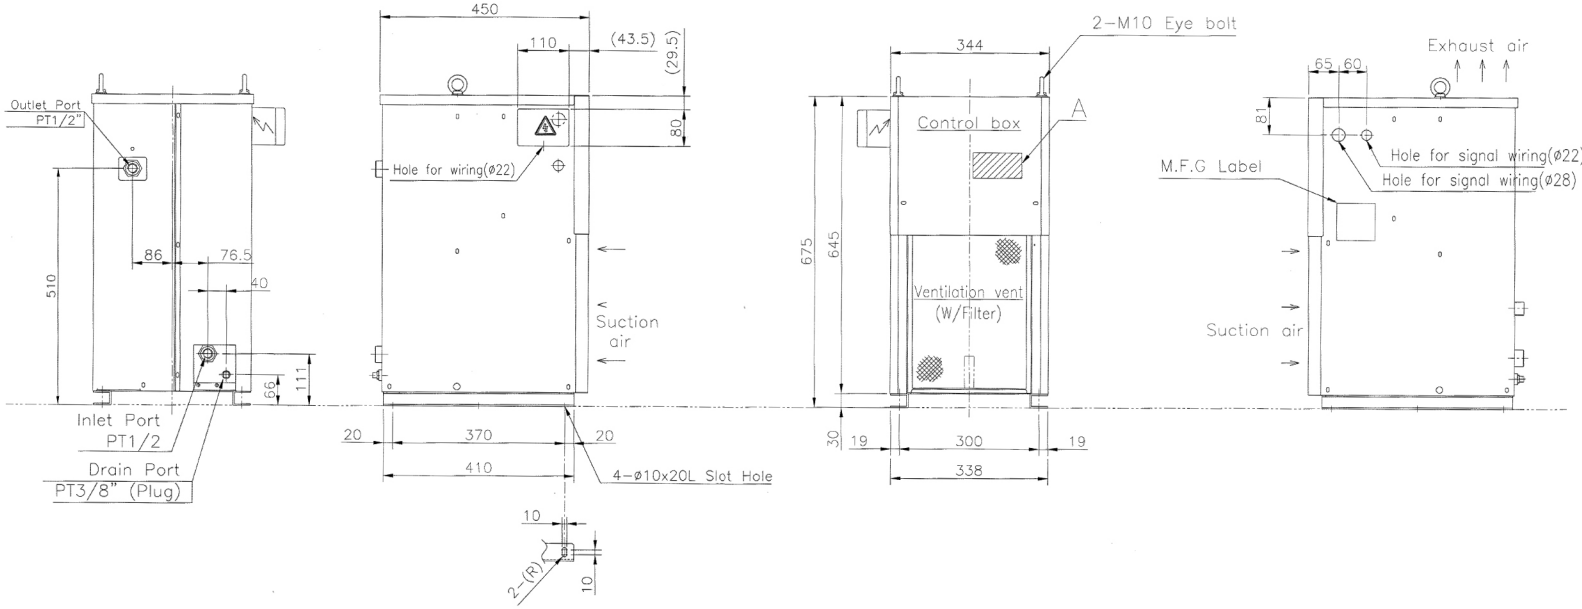

NOTE

1. COMPRESSOR(SANYO->LG) 변경에 의한 MODEL명 변경

SUFFIX	MARK	SUBJECT	ENC NO.	DATE	DRAWN	CHECKED
	⚠ X					
	⚠ X					
	⚠ X					

GENERAL TOLERANCE (MACHINING)		UNSPECIFIED CHAMFERS	–	APPROVE	K.J.PARK
LIMITS	MINUT NOR	UNSPECIFIED RADII	–	CHECKED	–
OVER ~ TO	ENESS MAL				
0.5 ~ 6	±0.05 ±0.1	HEAT TREATMENT HARDNESS	–	DISIGNED	S.H.KIM
6 ~ 30	±0.1 ±0.2				
30 ~ 120	±0.15 ±0.3				
120 ~ 315	±0.2 ±0.5	HEAT TREATMENT METHOD	–	DRAWN	S.H.KIM
315 ~ 1000	±0.3 ±0.8				
1000 ~ 2000	±0.5 ±1.2	SURFACE TREATMENT	–	DATE	2020.07.03
2000 ~ 4000	±0.8 ±2.0				

TITLE	OIL COOLER	Q'TY	1EA
ASS'Y	CIL501A-C	SCALE	N/S
MODEL	CIL-501	MAT.	COOLING UNIT
DRG.NO	–	W.T	-KG
A2			
PROJECT NAME	NANOCON	KWANG RIM CORPORATION	

A2 (420 X594)

THIS DRAWING IS PROPRIETARY TO KWANG RIM
NO PART OF THIS DRAWING MAY BE REPRODUCED
WITHOUT THE PERMISSION OF KWANG RIM
허가없이 복사할 수 없음.