
DWG.NO 400206-00193A

관리번호	MARK	DATE	DETAIL OF REVISION	CHECKED	APPROVED
	△				
	△				

Classification	In power supply OFF	Point of contact output classification	Rating load	Smallest point of contact voltage/electric current
NANOCON Alarm	OFF	Parameter setting Initial value – Normally "Close"	AC250V/3A DC30V/3A	DC5V/10mA
Alarm1	OFF	Parameter setting Initial value temperature warnning in a range – Normally "Close"	AC250V/3A DC30V/3A	DC5V/10mA
Alarm2	OFF	Parameter setting Initial value – FIL cleaning signature	AC250V/3A DC30V/3A	DC5V/10mA


Remote signal	OFF	ON	The part which is used for External start signal
Contact	Opening	Short or contact "Close"	Single pole and single action switch or make contact of start signal (Min. contact voltage/current satisfies more than 24V/20mA)

POWER SOURCE 200V 50/60Hz 3Ph
220V 60Hz

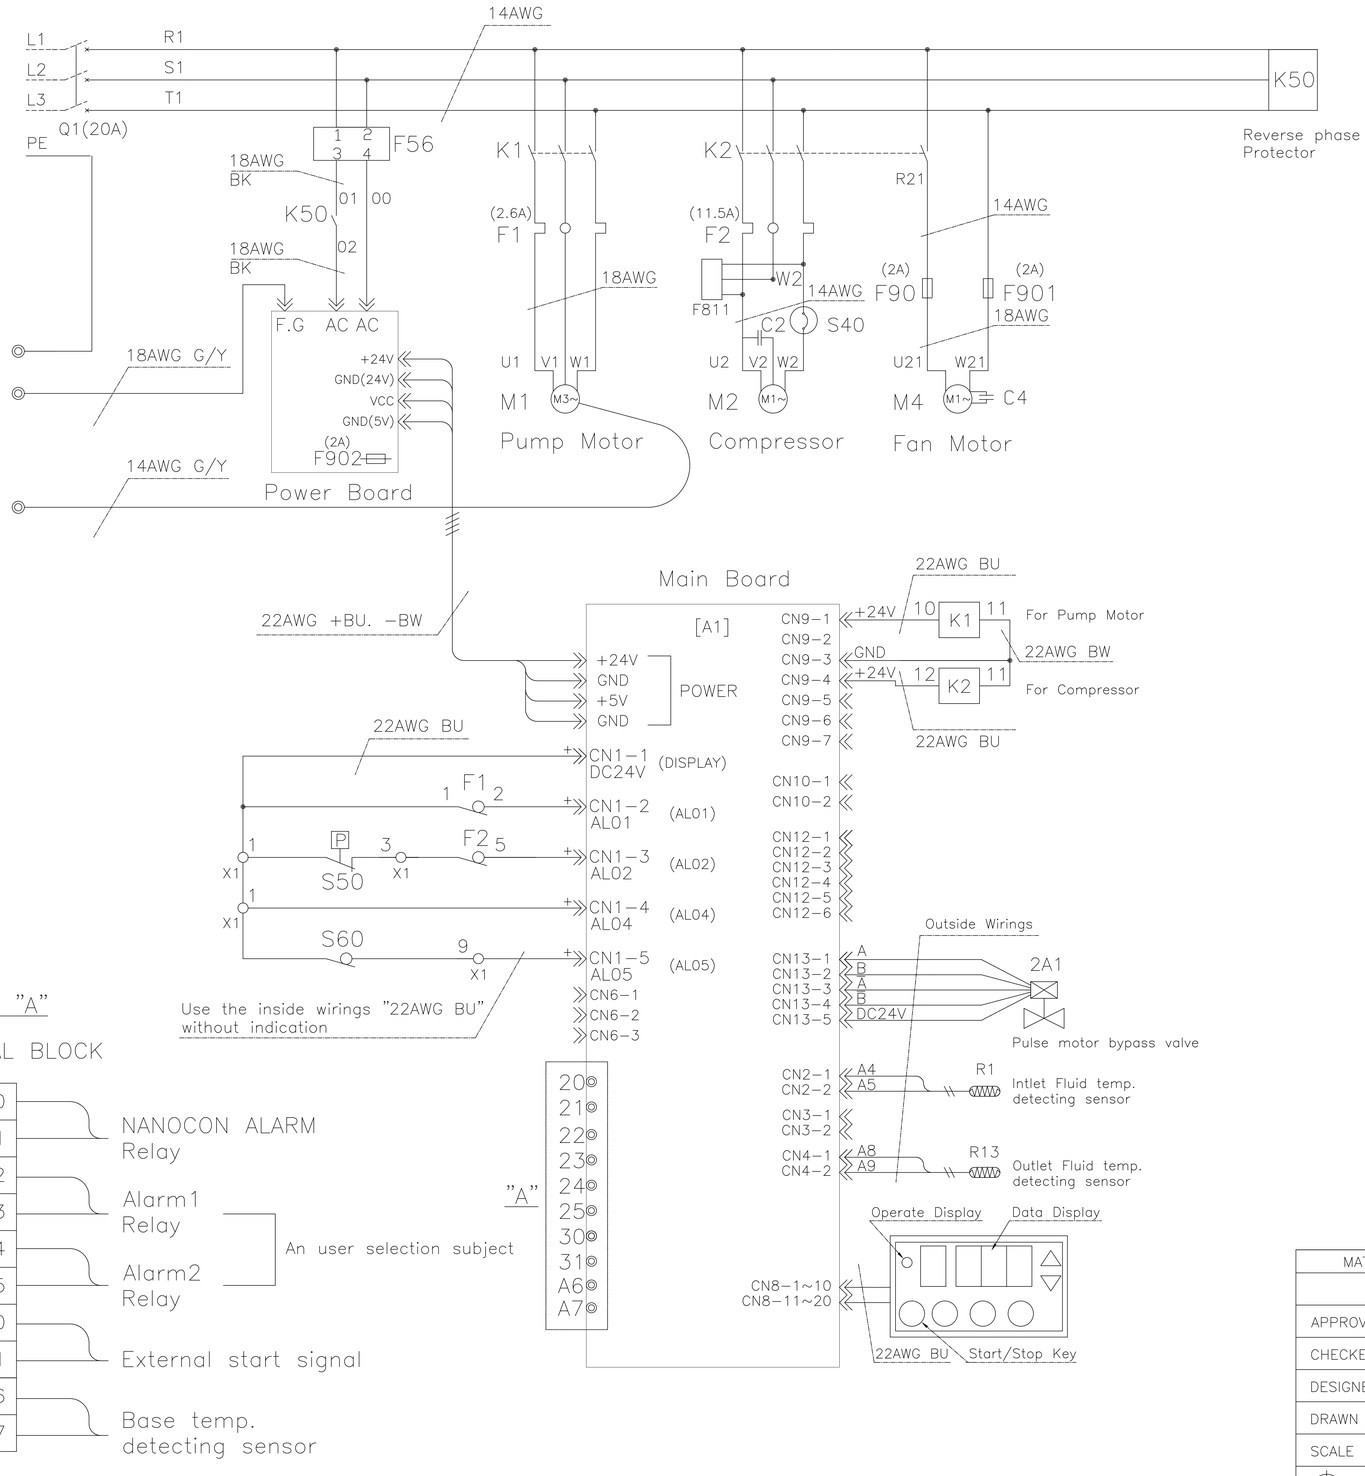

Detail "A"

TERMINAL BLOCK

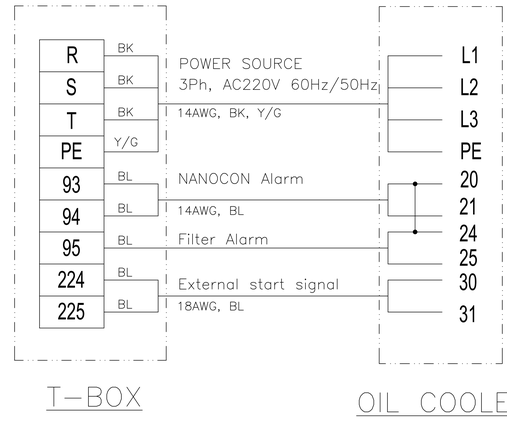

MAT'L	HEAT TREATMENT	SURF.TREATMENT		
			TITLE	ELECTRIC DIAGRAM
APPROVED	S.K.LEE	2016.09.19		CIL751A-C
CHECKED	S.H.HA	2016.09.19	PJT NAME	OIL COOLER
DESIGNED	S.H.KIM	2016.09.19		NANOCON
DRAWN	S.H.KIM	2016.09.19	DRG NO.	400206-00193A
SCALE N/S	W.T	Q'TY		
	MODEL CIL751A-C		KWANG RIM CORPORATION	

THIS DRAWING IS PROPRIETARY TO SPIC.
NO PART OF THIS DRAWING MAY BE REPRODUCED
WITHOUT THE PERMISSION OF SPIC.
이 기술자료는 ㈜ 성신의 소유입니다.
무단 복사 및 사용을 금합니다.